



ITEM # 1229C



U.S. Patent No. 5,272,931

1229C CYLINDER LOCKING HANDLE

- Fully door-mounted to assure locking regardless of door sag.
- Complete with revolutionary high strength, low maintenance inside safety release system.
- Installs on either right or left opening door with no modification.
- Handle is furnished with screw hole plugs for tamper-resistance*.
- Freezer Kit available for low temperature application. Low temperature grease with insulation cup.

1229 NON-LOCKING HANDLE

Non-locking handle only.

SPECIFICATIONS

PULL HANDLE

MATERIAL:
High pressure die-cast zinc

FINISH:
See table below

MOUNTING:
Drilled and countersunk for 1/4" (6.0mm) fillister head or No. 12 (5.0mm) self-tapping screws

INSIDE RELEASE

MATERIAL:
Metal hub and flange, stainless steel arm and bolt, nylon shaft, polypropylene strike


MOUNTING:
Holes drilled and countersunk for No. 10 (5.0 mm) flat head screws

SHAFT LENGTHS:
Standard lengths for door thickness from 3-1/2" to 4" (88.9 mm to 101.6mm). Please specify door thickness. Custom lengths available to specification. Minimum wall thickness 2-1/4" (57mm)

Model No.	Description	Finish	Qty/ Carton	Wgt/ Carton
11229C00024	Cylinder Locking with Inside Release	Brushed Chrome	6	15.5 lb. (7.1 kg)
11229C00025	Cylinder Locking with Inside Release	Polished Chrome	6	15.5 lb. (7.1 kg)
11229C00028	Cylinder Locking with Inside Release & Freezer Kit	Brushed Chrome	6	15.5 lb. (7.1 kg)
11229C00029	Cylinder Locking with Inside Release & Freezer Kit	Polished Chrome	6	15.5 lb. (7.1 kg)
11229000004	Non-locking Handle	Brushed Chrome	6	12.5 lb. (5.7 kg)
11229000005	Non-locking Handle	Polished Chrome	6	12.5 lb. (5.7 kg)
11229C0002865	Cylinder Locking with Inside Release & Freezer Kit	Brushed Chrome	6	*
11229C0002965	Cylinder Locking with Inside Release & Freezer Kit	Polished Chrome	6	*
90948000006	Freezer Kit			

Cylinder locks may be keyed alike or differently; 5 Key changes available; please specify.

90171CM000411	Cylinder Kit #411
90171CM000414	Cylinder Kit #414

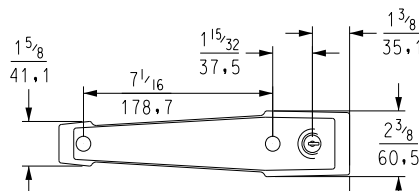

FREEZER KIT

*Kit consists of plastic cap to cover rod, gasket for handle flange and special instructions for low temperature installations. When used with the specified low-temp grease, seals the unit to prevent accumulation of moisture.



PUSH PANEL

