
8600EZ POWER SLIDING DOOR SYSTEMS

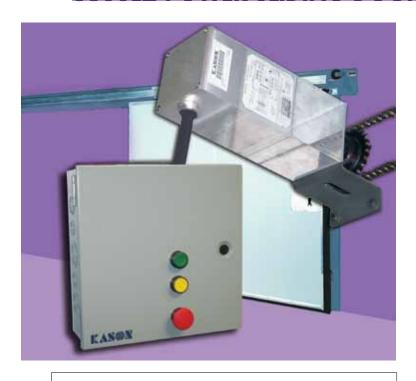

SPECIFICATIONS

ELECTRICAL:

Voltage: 115, 208, 230, 460, 575 VAC

single phase 50/60Hz

Accessory power tap provided

Environment: -20° C to +50° C


Output Torques: Up to 400 in./lb.

RPM: 200 max.

NEMA RATING:

Motor: NEMA 4
Controller: NEMA 1
(Optional: NEMA 4)

UL - ULC Listed

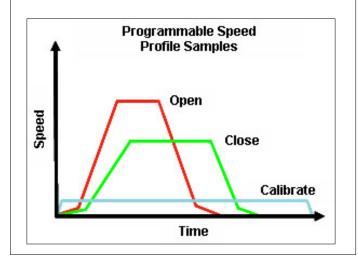

NEW FROM KASON

Innovative **EZ** mounting power door drives are your best bet for easy installion and smooth operation. Kason supplies the complete system. Just add power.

BENEFITS

- Easy installation.
- Compact high torque gear motor and control module require less space and mount quickly.
- Automatic force sensing protects door and operator.
- Auto door travel sensing no limit switch required.
- Adjustable time delay for automatic door closing to save energy.
- Zero maintenance, light weight aluminum motor.
- Panel mounted OPEN, CLOSE, STOP buttons.
- Universal voltage connection.

FEATURES

- Motor: DC high torque Stepper motor.
- Opening speed adjusts up to 36 inches per second.
- Automatic or manual door size calibration.
- 7 programmable inputs for loop sensors, ultrasonic sensors, radio control, and more.
- Adjustable time delay automatocally recloses door after selected delay time.
- Man-door option opens door only 3 feet and recloses after 5 seconds.
- Accessory power tap, standard.
- Electronic overload protection; no mechanical clutch required.
- · Cycle counter.
- Openings from 3' (36") to 16' (192")

CONTACT

U.S.A. TEL. 1-800-935-2766 CANADA TEL. 1-905-713-6515 INTERNATIONAL EMAIL mkatz@kasonind.com

