


ALL SCREW HOLES ARE DRILLED AND COUNTERSUNK FOR 1/4" SCREWS, EXCEPT AS OTHERWISE NOTED.

SLOTS CAST FOR 5/16" LAG SCREWS

OFFSET DIM. "A"		MOUNTING DIM. "B"	
MIN.	MAX.	MIN.	MAX.
3/4	1 1/8	1 1/2	1 5/8
1 1/4	1 3/8	1 1/8	1 1/4

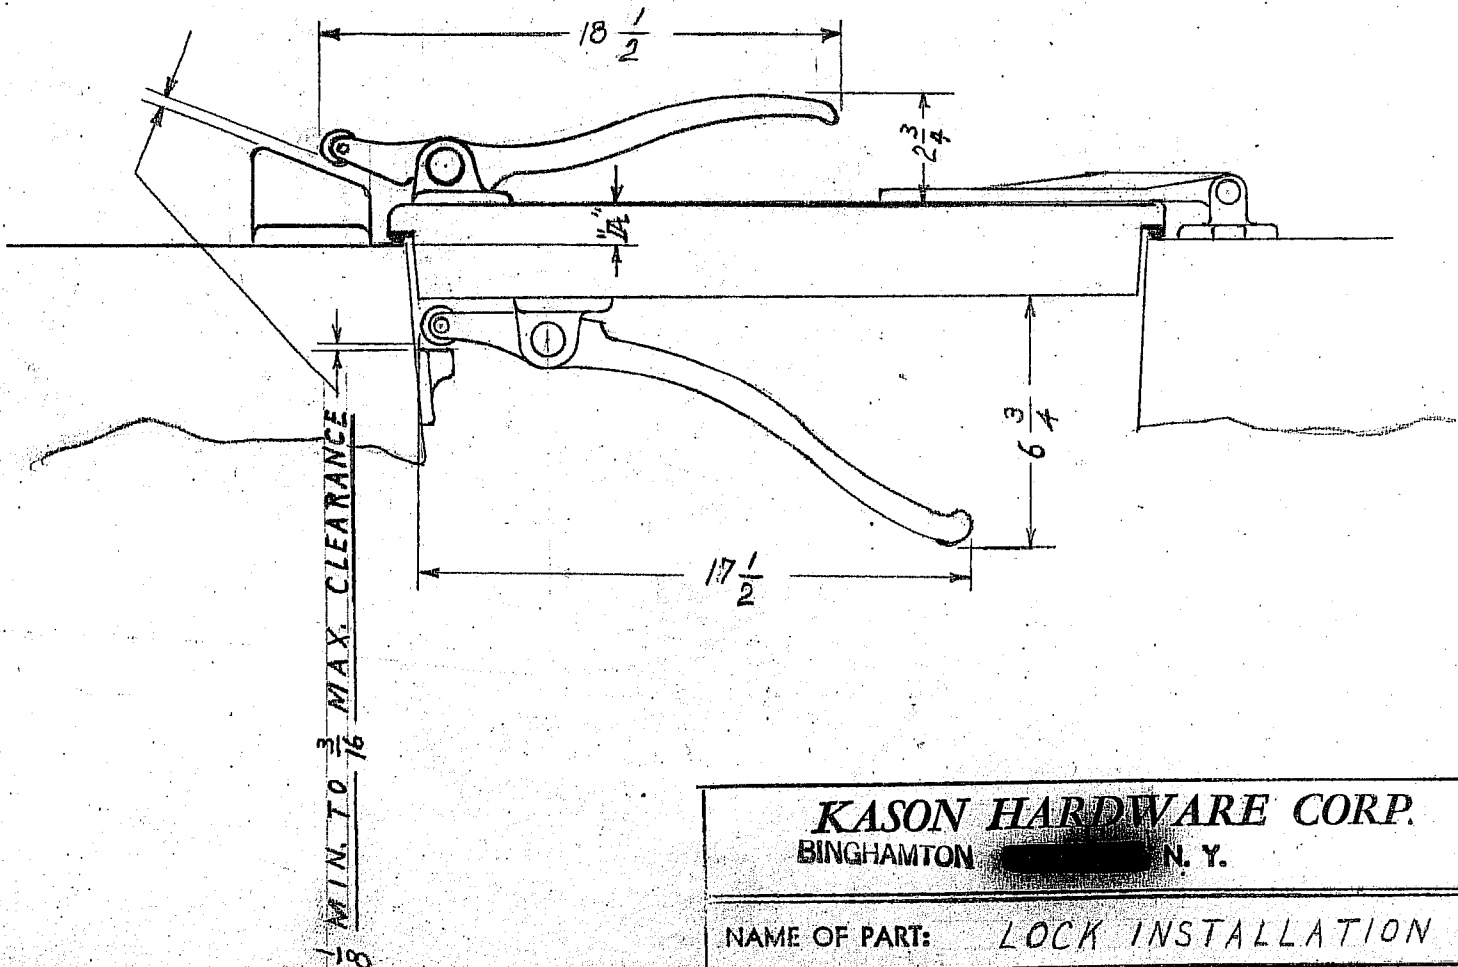

KASON HARDWARE CORP. BINGHAMTON N. Y.		DRAWN BY: H. HAMBURG
NAME OF PART: LOCK INSTALLATION		DATE 5-1-53
CAT. NO.: 189		CHECKED BY:
DRAW NO.: Y-20191		SCALE: REDUCED