## ⚠ CAUTION

- This product must be installed in accordance with local and national electric codes by a qualified electrician. The manufacturer assumes no responsibility for improper installation, or application of this lighting fixture

- All supply wires must be suitable for 90°C

- Turn off all electricity before installation or servicing

- This "FIXTURE MUST BE GROUNDED"

- Verify a secure connection at the mounting brackets

- NO SERVICEABLE PARTS

- Sealing of wire opening is necessary to prevent condensation from forming and water collection inside the fixture. Failure to properly seal fixture will VOID warranty
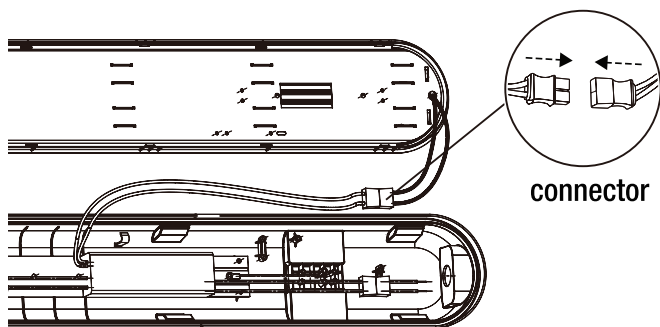
DIRECTIONS

1. **Turn Off all Electricity Before Installation or Servicing**

OFF

2. **Opening the Lens Cover**

- Open lens cover by the connector of the fixtures body


connector

3. **Installing the Clamps**
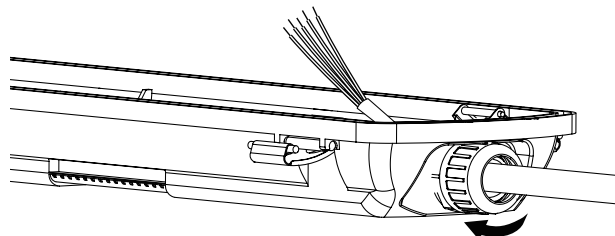
- Put the clamps onto the fixture body

4. **Installing the Cord Grip**

- Remove the nut from the end of the cord grip and insert the threaded end into the knock out hole at the end of the fixture body

5. **Feeding the Wires**

- Feed the wires from the electrical source through the cord grip and into the fixture body
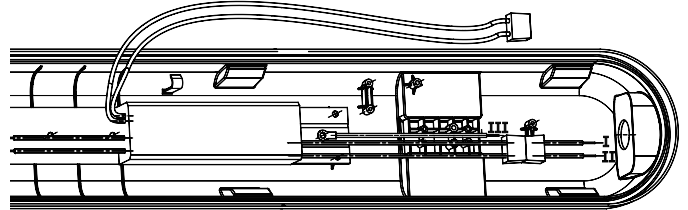
- Tighten the nut onto the cord grip to secure the wires

6. **Making the Electrical Connections**

- Connect the hot and neutral (black and white) wires from the electrical source to the same color wires from the LED driver box

- Connect the green ground wire from the electrical source to the green/yellow ground wire from the fixture body

- If a 0-10 VAC dimming circuit is available, connect the purple and gray wires from the electrical source to the same color wires from the LED driver box

- If 0-10 VAC dimming is not desired, wrap the ends of the purple and gray wires with electrical tape to cover the wires

- Cover each wire connection with a wire connector and electrical tape (not included)

7. **Mounting the Fixture**

(1)

(2)

(3)

ON