



0450KL2100 Series Electronic Faucets

Part Number: 60450KL210*

0450KL2100 Deck Mount

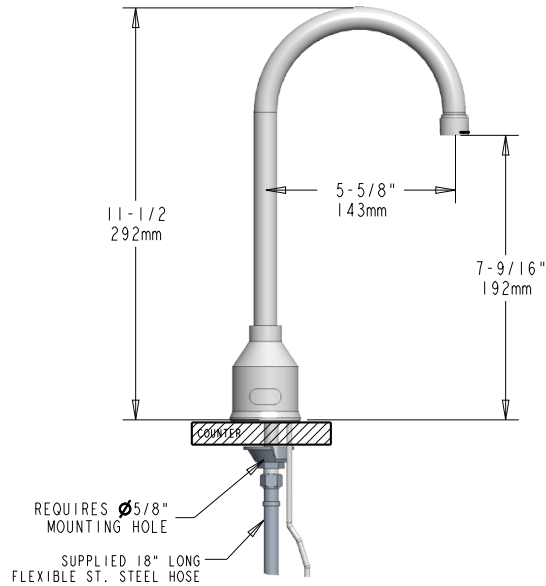

0450KL2101/2/3 Wall Mount

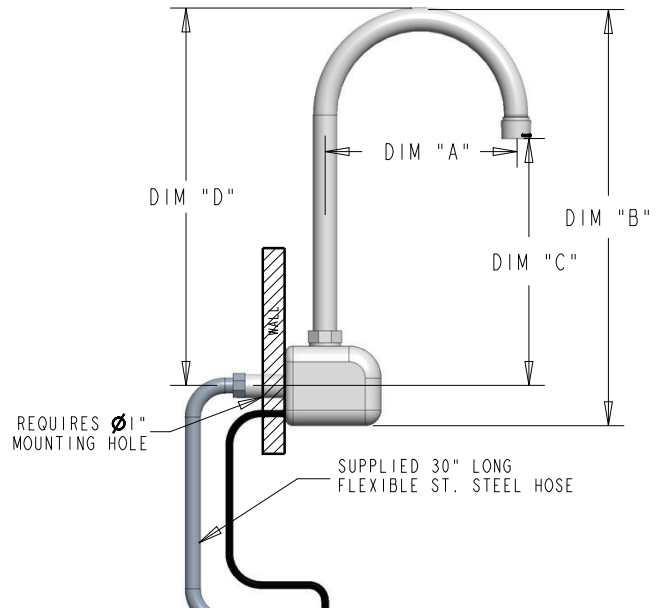

*Part No.	Description	Dim "A"	Dim "B"	Dim "C"	Dim "D"
60450KL2100	Electronic Faucet, Deck Mount	--	--	--	--
60450KL2101	Electronic Faucet, Wall Mount, Low Lead, 6" Gooseneck Spout	6-3/4" (17.1 cm)	10-3/4" (27.3 cm)	4-13/16" (12.2 cm)	9-1/4" (23.5 cm)
60450KL2102	Electronic Faucet, Wall Mount, Low Lead, 3-1/2" Gooseneck Spout	3-1/2" (8.9 cm)	5-5/8" (14.3 cm)	2-7/8" (7.3 cm)	7-1/8" (18.1 cm)
60450KL2103	Electronic Faucet, Wall Mount, Low Lead, 8-1/2" Gooseneck Spout	8-1/8" (20.6 cm)	13-7/16" (34.1 cm)	6-7/8" (17.5 cm)	11-15/16" (30.3 cm)

FEATURES

- Sensor activated hands-free operation
- Integrated temperature control mixing valve
- Low battery light indicator
- Sensor range adjustment
- Auto time-out adjustment
- Water shut-off delay adjustment

MATERIALS

- Low lead brass, stainless steel, EPDM, Delrin

DESIGN CRITERIA

- Maximum Operating Pressure: 125 psig (861 kPa)
- Maximum Hot Water Temperature: 200°F (93.3°C)
- All models have a flow restriction of 0.5 GPM (2.2 L/min) max.

