


0480 Collapsible Handle Inside Release

Part Number: 10480*



3 HOLES EQUALLY SPACED
MOUNT USING
#10 PAN OR ROUND
HEAD SCREWS

FEATURES



- Unique collapsible handle inside release is ideal for truck or shipboard applications where shifting cargo may actuate standard models
- Mechanism allows user to exit enclosure when door is latched or locked if paired with appropriate Kason SafeGuard® Latch

MATERIALS

- **Flange:** 1008-1010 CRS, commercial zinc plate
- **Push Rod:** 1018 round bar, commercial zinc plate finish
- **End Knob:** Aluminum alloy 6063-T52, raw finish
- **Pin:** CRS, SAE 1060-1095, commercial zinc plate finish

DESIGN CRITERIA

- Cycle tested to 250,000 cycles
- Mounting holes drilled for No. 10 (5 mm) screws
- **Temperature Range:** -20°F to 150°F (-28.9°C to 66°C)

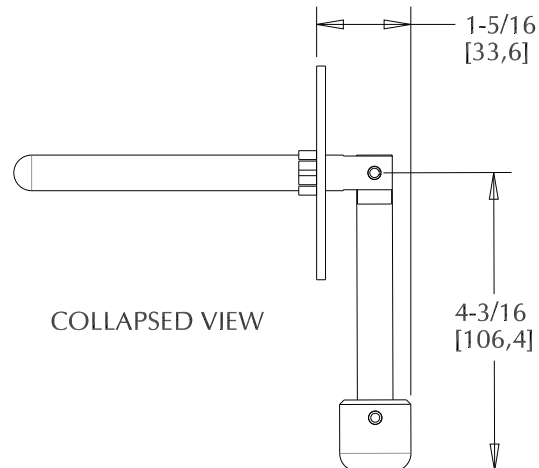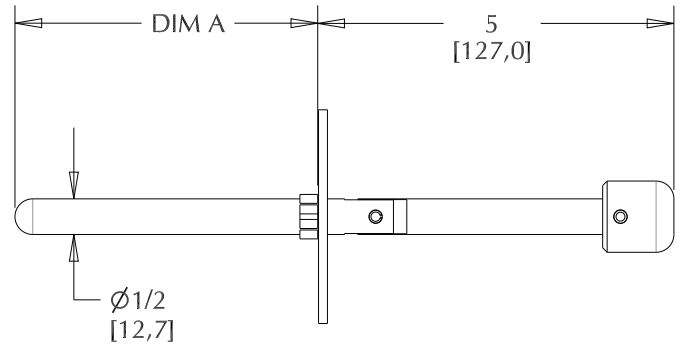

Part No.*	Door Thickness	Dim. A	Use with Latch
10480000300	3" (76.2 mm)	3-1/4" (82.6 mm)	
10480000400	4" (101.6 mm)	4-1/4" (108 mm)	
10480000450	4-1/2" (114.3 mm)	4-3/4" (120.7 mm)	0045, 4545, 0050, 5050, 0056, 5656
10480000600	6" (152.4 mm)	6-1/4" (158.8 mm)	
10480000725	7-1/4" (184.2 mm)	7-1/2" (184.2 mm)	

0480 Collapsible Handle Inside Release

Part Number: 10480*

HOW TO SELECT AND ORDER INSIDE RELEASE HANDLES

1. From Table A choose the appropriate inside release handle for each latch.
2. Refer to Table B for minimum door thickness required for each inside release model.
3. Specify exact thickness of your door. We will use this information to convert your requirements into our part numbers.

Table A

Latches	Inside Release Handles
0045, 0046, 0050, 0051, 4545, 4646, 5050, 5151	0480, 0481B, 0482B, 0486B, 0487B, 0489B
0052, 0053	0481B, 0482B, 0486B, 0487B, 0489B
0055XXL	0486D, 0489D
0056, 5656	0480, 0483, 0481A, 0481SA, 0482A, 0486A, 0487A, 0488A, 0489A
0058, 0077, 0078, 0778	0481C, 0481SC, 0482C, 0486C, 0487C, 0488C, 0489C

Table B

Inside Release Handles	Minimum Door Thickness
0481C, 0481SC, 0482C, 0483, 0487C	1-1/2" (38.1 mm)
0481A, 0481SA, 0482A, 0487A	2-1/2" (63.5 mm)
0486D	2-11/16" (68.3 mm)
0489D	2-3/4" (69.9 mm)
0481B, 0482B, 0486B, 0486C, 0487B	3" (76.2 mm)
0489B, 0489C	3-1/4" (82.6 mm)
0480	3-1/2" (88.9 mm)
0486A	3-3/4" (95.3 mm)
0489A	4" (101.6 mm)