


PRODUCT  
*SPECIFICATIONS*

**EZ**  
**KLEEN**  
*AIR FILTERS*

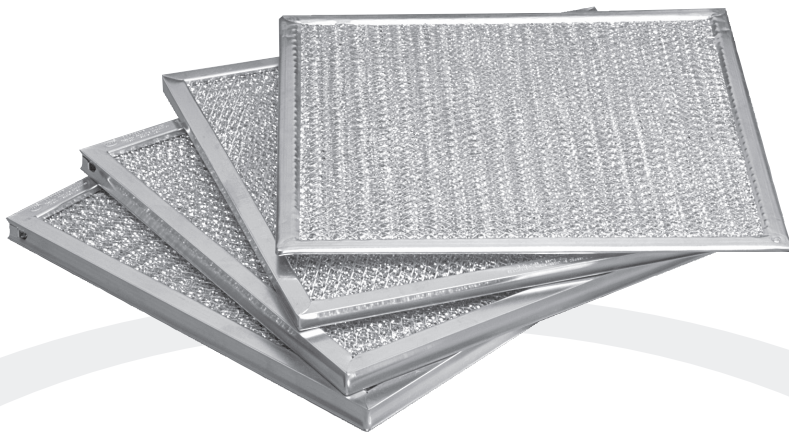

**KLEEN-**  
**GARD**  
*GREASE FILTERS*

# EZ KLEEN® AIR FILTERS

AIR FILTER	STOCK SIZE (H x W x D) Nominal	STOCK NO.	PERFORMANCE			
<b>EZ KLEEN®</b>  <i>UL Classified</i> <b>Rated Velocity</b> 150-650 FPM (0.76-3.31 m/s) <b>Optimum Velocity</b> 350-520 FPM (1.78-2.64 m/s)				<b>1" EZ Kleen Filters</b>		
	20" x 25" x 1"	9801	1" (25mm) & 3/32 (2.4mm)	At 350 fpm (1.78 m/s)	At 520 fpm (2.64 m/s)	
	20" x 20" x 1"	9802		Average Arrestance	54%	48%
	16" x 25" x 1"	9803	Clean Resistance	0.045" w.c. 0.011 kPa	0.09" w.c. 0.023 kPa	
	16" x 20" x 1"	9804		Dust-Holding Capacity	95 gms/ft <sup>2</sup> (1023 gms/m <sup>2</sup> )	67 gms/ft <sup>2</sup> (721 gms/m <sup>2</sup> )
	15" x 20" x 1"	9805	Dust-Holding Capacity	130 gms/ft <sup>2</sup> (1399 gms/m <sup>2</sup> )	91 gms/ft <sup>2</sup> (980 gms/m <sup>2</sup> )	
10" x 20" x 1"	9806					
<b>MIST ELIMINATOR</b>  <i>UL Classified</i> <b>Rated Velocity</b> 150-650 FPM (0.76-4.58 m/s) <b>Optimum Velocity</b> 350-520 FPM (1.78-2.64 m/s)				<b>2" EZ Kleen Filters</b>		
	20" x 25" x 2"	9151	Average Arrestance	At 350 fpm (1.78 m/s)	At 520 fpm (2.64 m/s)	
	20" x 20" x 2"	9152		Clean Resistance	0.07 w.c. 0.018 kPa	0.14" w.c. 0.035 kPa
	16" x 25" x 2"	9153	Dust-Holding Capacity	143 gms/ft <sup>2</sup> (1539 gms/m <sup>2</sup> )	117 gms/ft <sup>2</sup> (1259 gms/m <sup>2</sup> )	
	16" x 20" x 2"	9154				
	15" x 20" x 2"	9155				
	10" x 20" x 2"	9156				
24" x 24" x 2"	9157					
<b>INDUSTRIAL EZ KLEEN®</b>  <i>UL Classified</i> <b>Rated Velocity</b> 150-900 FPM (0.76-4.58 m/s) <b>Optimum Velocity</b> 350-520 FPM (1.78-2.64 m/s)				<b>2" Industrial Filters</b>		
	20" x 25" x 2"	901	Average Arrestance	At 350 fpm (1.78 m/s)	At 520 fpm (2.64 m/s)	
	20" x 20" x 2"	902		Clean Resistance	0.05 w.c. 0.013 kPa	0.10" w.c. 0.025 kPa
	16" x 25" x 2"	903	Dust-Holding Capacity	100 gms/ft <sup>2</sup> (1075 gms/m <sup>2</sup> )	95 gms/ft <sup>2</sup> (1023 gms/m <sup>2</sup> )	
	16" x 20" x 2"	904				
	15" x 20" x 2"	905				
10" x 20" x 2"	906					
<b>TRIM-TO-SIZE EZ KLEEN®</b>  <i>UL Classified</i>				<b>1/4" Trim-To-Size</b>	<b>5/8" Trim-To-Size*</b>	
	15" x 24" x 1/4"	9200	Average Arrestance	At 350 fpm (1.78 m/s)	At 350 fpm (1.78 m/s)	
	40" x 64" x 1/4"	9250		Clean Resistance	0.07 w.c. 0.018 kPa	0.45" w.c. 0.011 kPa
	40" x 64" x 5/8"	9251	Dust-Holding Capacity	44 gms/ft <sup>2</sup> (474 gms/m <sup>2</sup> )		
	40" x 50" x 1/4"	9260				
40" x 50" x 5/8"	9261					
<b>MADE-TO-ORDER EZ KLEEN®</b>  <i>UL Classified</i> Minimum quantities may apply.			<b>EZ Kleen Filters 3/32," 3/8," 1/2"</b>			
			3/32," 3/8," 1/2" Nominal Frame Thickness	At 350 fpm (1.78 m/s)		
			Average Arrestance	64%		
			Clean Resistance	0.06 w.c. 0.016 kPa		
			Dust-Holding Capacity	44 gms/ft <sup>2</sup> (474 gms/m <sup>2</sup> )		

\*See 1" EZ Kleen performance for 520 fpm

# KLEEN-GARD® BAFFLE TYPE GREASE FILTERS

ALUMINUM

GALVANIZED STEEL

STAINLESS STEEL

RATED VELOCITY 150-400 FPM (0.76-2.04 m/s)  
OPTIMUM VELOCITY 300 FPM (1.53 m/s)


(H X W X D) Nominal	ALUMINIUM STOCK NO.	GALVANIZED STOCK NO.	STAINLESS STOCK NO.
<b>Standard filters without handles</b>			
20" x 25" x 2"	951	931	961
20" x 20" x 2"	952	932	962
16" x 25" x 2"	953	933	963
16" x 20" x 2"	954	934	964
10" x 20" x 2"	956	936	966
16" x 16" x 2"	957	937	967
25" x 20" x 2"	958	938	968
<b>Standard filters with no. 994 snap-in handles</b>			
20" x 25" x 2"	9511	9319	9611
20" x 20" x 2"	9522	9329	9622
16" x 25" x 2"	9533	9339	9633
16" x 20" x 2"	9544	9349	9644
10" x 20" x 2"	9566	9359	9666
16" x 16" x 2"	9577	9369	9677
25" x 20" x 2"	9588	9379	9688

ALWAYS ORDER BY STOCK NUMBER

## Kleen-Gard® Baffle Grease Filters

- + Stainless steel provides added durability and corrosion resistance
- + Promotes sanitation by removing grease from the air flowing through filters and draining it safely away
- + Prevents spread of range-top fires
- + Kleen-Gard is UL classified and meets requirements of [NFPA Standard 96](#) when properly installed
- + Protects blower equipment and prolongs motor life
- + Handles up to 400 fpm (2.04 m/s)

Resistance Vs. Airflow — 2" Kleen-Gard Baffle Type Grease Filters

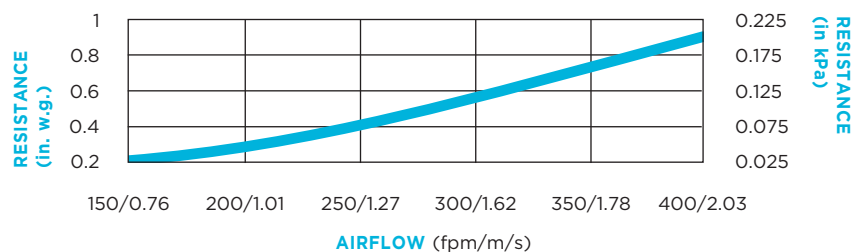

## Kleen-Gard Spark Arrestor Filters

***Stainless Steel Kleen-Gard Grease Filter with Spark Arrestor available to meet NFPA 96 standards for its solid fuel cooking applications.***


- + Spark Arrestor constructed of stainless steel mesh in tin-plated steel frame
- + All-in-one construction for ease of handling
- + Supplied with snap-in handles for easy installation and removal
- + Available in same sizes as baffle filters, as well as special sizes

## Kleen-Gard HE Series Filters

- + Upgrade efficiency of existing hoods to 80% for particles over 8.5 microns
- + Cost effective compared to other high-efficiency filters in the market
- + Superior performance for cleaner exhaust ducts
- + UL classified and meet NFPA 96 standards
- + Increased applications: charbroiling, fryers, combination gas ovens, griddles, up-right broilers
- + Easy cleaning: hot water and dish soap can clean standard grease build up
- + Snap-in handles or locking handles available for easy installation and removal

## Customized Services for Our Customers

- + Stock filters are shipped within 24 hours with over 97% of these shipments being made the same day the order is received
- + Special size filters are shipped within 10 business days
- + To avoid a line shutdown, a partial shipment can be made of special sizes within 48 hours
- + Safety stock program
- + No charge samples of the actual filter size which are shipped within only 48 hours
- + Additional filter types are available: foam, charcoal and polyester
- + No expediting fees
- + Special freight rates negotiated through designated carriers
- + International quality standards established
- + Electronic Data Interchange (EDI) and bar coding capabilities for simpler ordering and receiving
- + Alternative product designs to offer economies

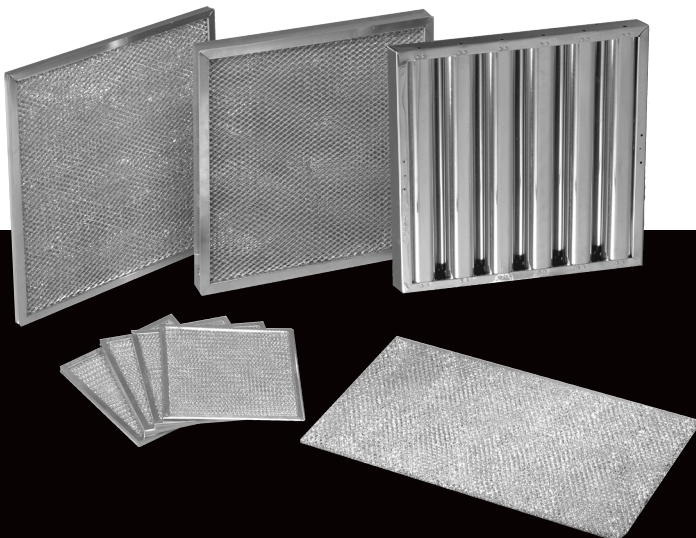

1.800.935.2766

[KASONIND.COM](http://KASONIND.COM)

Form No. 1963C 285776  
Printed in the USA 03.19

