

EZ KLEEN® TOUGHNESS

NEW HEAVY DUTY CONSTRUCTION

- + Standard and custom-built filters
- + Maximum airflow performance with long service life
- + Optimal removal of dirt, dust and pollen
- + Best air filtration value for commercial and residential HVAC systems


Filter Performance Enhancer Stock #412

Super Filter Coat improves the air filter efficiency at capturing airborne dust, dirt, pollen and other impurities. It is a water soluble sprayed-on or dipped-in adhesive. It meets US Federal specification F-F-300B and NFPA standards 90A and 90B and Canadian Standards Association. Suggested application is 10 grams per square feet (10 grams per 929 square centimeters).



AIR FILTER	STOCK SIZE (H x W x D) Nominal	STOCK NO.	PERFORMANCE		
EZ KLEEN® <i>UL Class 2 Filter</i> Rated Velocity 150-650 FPM (0.76-4.58 m/s) Optimum Velocity 350-520 FPM (1.78-2.64 m/s)	2" EZ Klean Filters-MERV 4			At 350 fpm (1.78 m/s)	At 520 fpm (2.64 m/s)
	20" x 25" x 2"	9151	Average Arrestance	72%	68%
	20" x 20" x 2"	9152	Clean Resistance	0.07 w.c. 0.018 kPa	0.14" w.c. 0.035 kPa
	16" x 25" x 2"	9153	Dust-Holding Capacity	130 gms/ft ² (1399 gms/m ²)	91 gms/ft ² (980 gms/m ²)
	16" x 20" x 2"	9154			
	15" x 20" x 2"	9155			
	10" x 20" x 2"	9156			
24" x 24" x 2"	9157				
INDUSTRIAL EZ KLEEN® <i>UL Class 2 Filter</i> Rated Velocity 150-900 FPM (0.76-4.58 m/s) Optimum Velocity 350-520 FPM (1.78-2.64 m/s)	2" Industrial Filters-MERV 4			At 350 fpm (1.78 m/s)	At 520 fpm (2.64 m/s)
	20" x 25" x 2"	901	Average Arrestance	67%	64%
	20" x 20" x 2"	902	Clean Resistance	0.05 w.c. 0.013 kPa	0.10" w.c. 0.025 kPa
	16" x 25" x 2"	903	Dust-Holding Capacity	143 gms/ft ² (1539 gms/m ²)	117 gms/ft ² (1259 gms/m ²)
	16" x 20" x 2"	904			
	15" x 20" x 2"	905			
	10" x 20" x 2"	906			

Resistance & Arrestance vs. Dust Fed

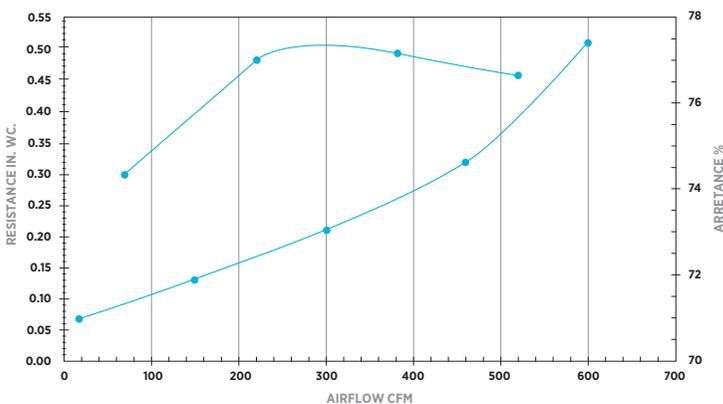

Initial Resistance vs. Airflow

