


Easimount® Vinyl Strip Curtain System

Part Number: SA/LA#####

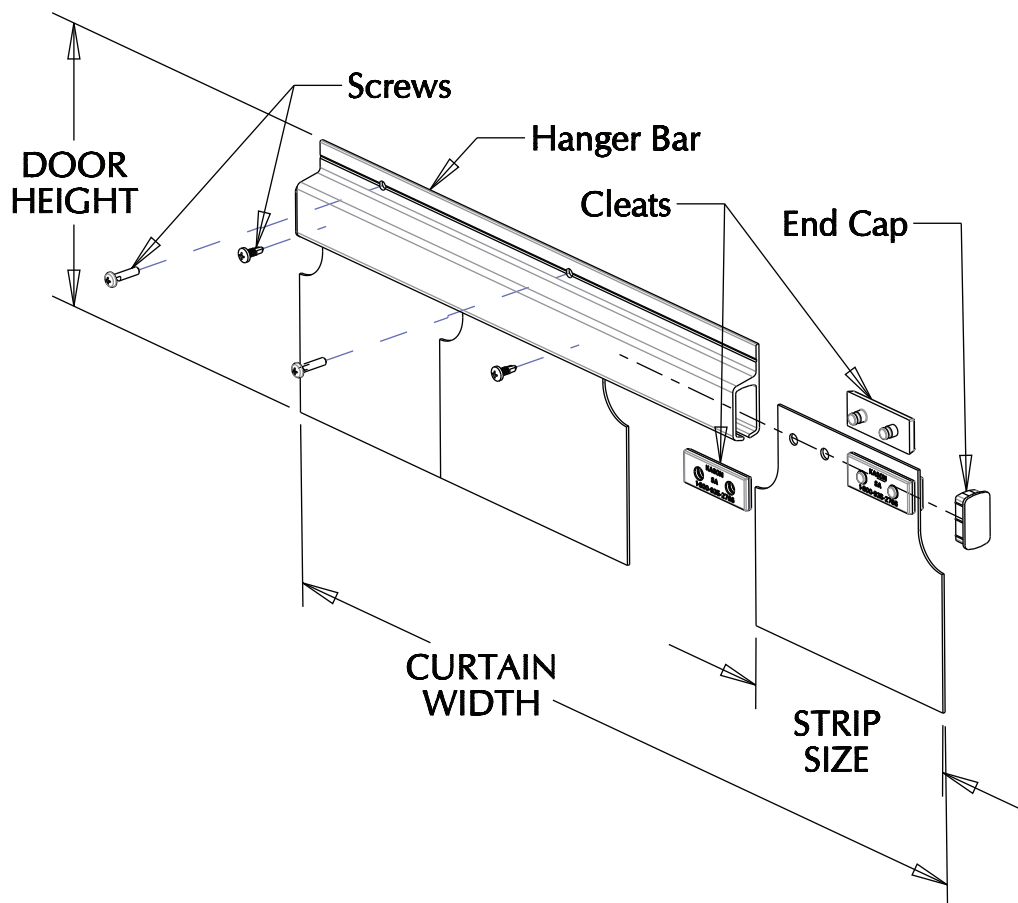

FEATURES

- Significantly reduces infiltration through open walk-in refrigerator and freezer doors
- Mounting system features pre-cleated, slide in strips for quick mounting and removal
- Strong, light weight aluminum track installs easily
- Patented mounting system that prevents tear-out
- Available in a variety of vinyl strip widths and materials
- Custom sizes available upon request

MATERIALS

- Hanger Bar: 6060-T5 Aluminum
- Cleats: Polyethylene, Alt. Polypropylene
- End Cap: Polyethylene, Alt. Polypropylene
- Strips: Vinyl (See table on page 2)
- Screws: Stainless Steel


DESIGN CRITERIA

- Temperature Rating (See Table on page 2)
- Overlap: 50% Standard (Options for 33% or 66%)
- Select curtain width greater than door opening width.
- Select curtain length equal to door opening height.
(Product is made longer than nominal height by approx. 1.5")

Easimount® Vinyl Strip Curtain System

Part Number: SA/LA#####

Vinyl Part Numbering System

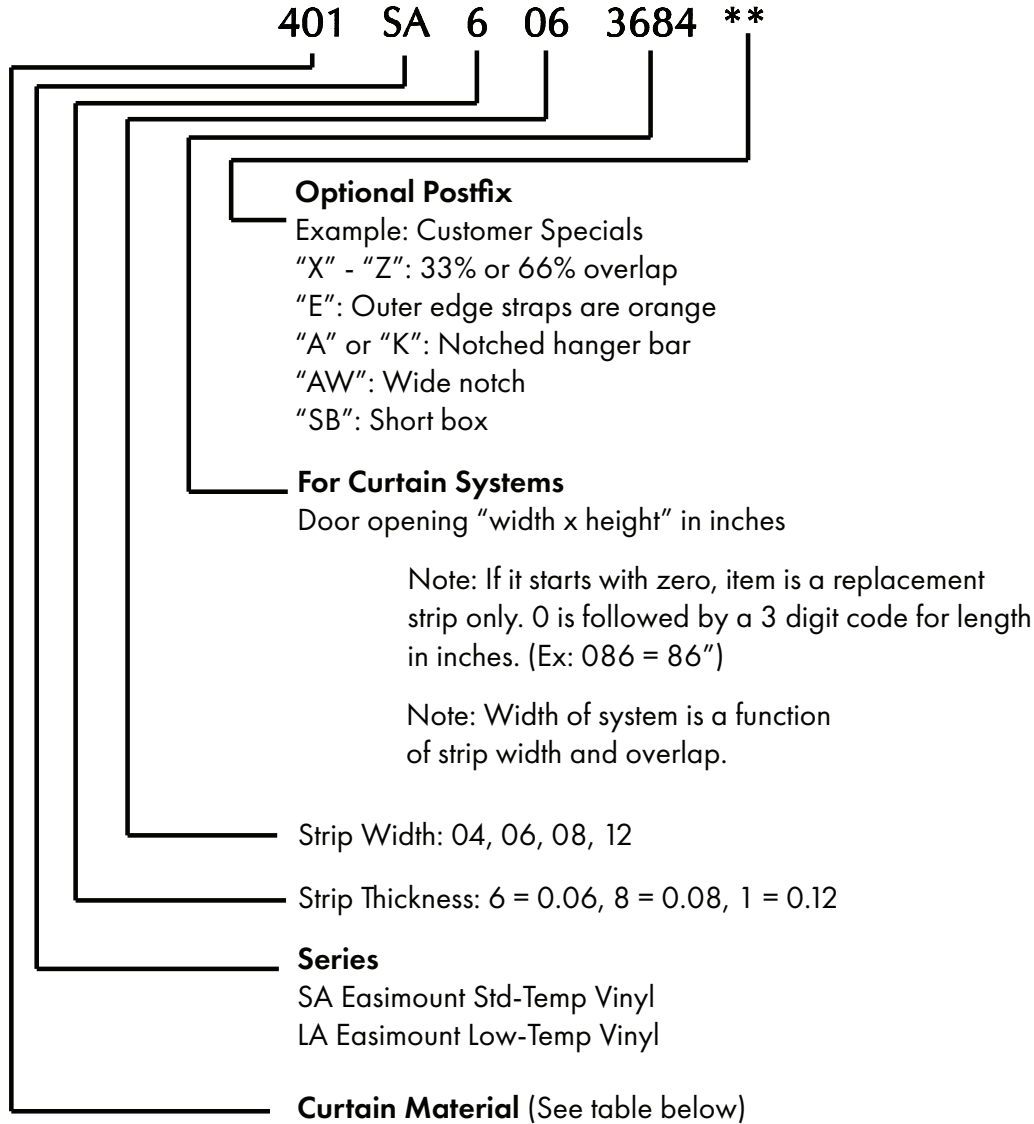

Material	Description	Temperature Range	Strip Sizes
401	Standard Smooth	-10°F to 150°F (-23.3°C to 65.6°C)	4", 6", 8", 12" (10.2, 15.2, 20.3, 25.4 cm)
402	Low-Temp., Smooth (USFDA Approved)	-40°F to 140°F (-40°C to 60°C)	4", 6", 8", 12" (10.2, 15.2, 20.3, 25.4 cm)
403	Low-Temp., Reinforced (USFDA Approved)	-40°F to 140°F (-40°C to 60°C)	4", 6", 8", 12" (10.2, 15.2, 20.3, 25.4 cm)
406	Anti-Static, Smooth	-10°F to 150°F (-23.3°C to 65.6°C)	4", 6", 8", 12" (10.2, 15.2, 20.3, 25.4 cm)
407	Weld-Screen, Smooth	-5°F to 160°F (-20.5°C to 71.1°C)	4", 6", 8", 12" (10.2, 15.2, 20.3, 25.4 cm)
408	Opaque Black, Smooth	-5°F to 160°F (-20.5°C to 71.1°C)	4", 6", 8", 12" (10.2, 15.2, 20.3, 25.4 cm)
409	Safety Orange, Smooth	-20°F to 140°F (-28.9°C to 60°C)	4", 6", 8", 12" (10.2, 15.2, 20.3, 25.4 cm)
410	Extra Low-Temp., Smooth (USFDA Approved)	-70°F to 105°F (-56.7°C to 40.6°C)	4", 6", 8", 12" (10.2, 15.2, 20.3, 25.4 cm)